

by Honeywell

Description

The Gamewell-FCI, ASM-16 Addressable Switch Module serves as the point of interface between an operator and the system's audio evacuation, fire fighter intercom, and building control circuits. It is a component of the following systems:

- E3 Series® Expandable Emergency Evacuation System
- E3 Series Combined Fire and Mass Notification System
- E3 Series Broadband Voice Evacuation System
- S3 Series (Small Addressable Fire Alarm Control Panel)
- NetSOLO® System

The ASM-16 is a configurable switch input sub-assembly with 16 switches and 48 status LEDs. It may be remotely located via the RS-485 serial interface. Each ASM-16 addressable switch module has 16 push-button switches that can be programmed to serve any function the application demands.

An ASM-16 switch can be programmed to operate as any of the following functions:

- speaker circuit switch
- fire fighter phone switch
- auxiliary control switch
- switches with custom-defined functions:
 - system reset
 - system silence
 - system acknowledge
 - all-call, phone patch
 - lamp test, alarm tone on
 - manual select, etc.

Each ASM-16 switch also has three fully programmable LEDs that appear in red, yellow, and green. These LEDs can be programmed to work in concert with their associated push-button switch or they can be programmed to work independently as status indicators (e.g. on, off, normal, etc.).

An INI-VGC, ILI-MB-E3/ILI95-MB-E3 or SLP (Smart Loop Panel) can accommodate up to 16 ASM-16 modules for a total of 256 switches and 768 LEDs.


Specifications

Operating Voltage:	24 VDC (nominal) (from the PM-9/PM-9G power supply)
Operating Current:	0.011 amp. (with no LEDs lit)
Operating Temperature:	32° to 120° F (0° to 49° C)
Relative Humidity:	0 to 93% (non-condensing) at 90° F (32° C)

E3 Series® and NetSOLO® are registered trademarks of Honeywell International Inc.

UL® is a registered trademark of Underwriters Laboratories Inc.

ASM-16 Addressable Switch Module

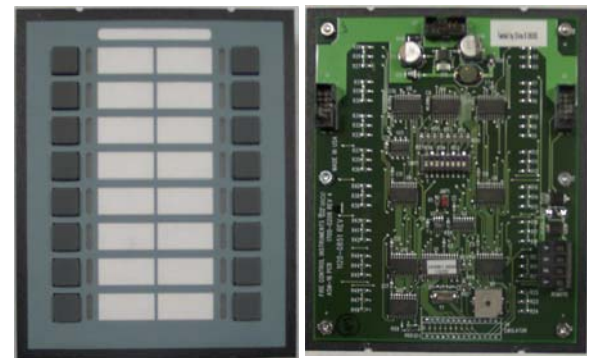

Front View

Rear View

Features

- Listed under UL® Standard 864, 9th Edition.
- Listed under UL® Standard UL2572 for Mass Notification.
- Each INI-VGC supports up to 16 ASM-16 switch modules for a total of 256 switches.
- Each ILI-MB-E3/ILI95-MB-E3 supports up to 16 ASM-16 switch modules for a total of 256 switches.
- Each SLP supports up to 16 ASM-16 switch modules for a total of 256 switches.
- Each ASM-16 switch has 3 fully programmable status, indicating LEDs: red, yellow, and green.
- All switch functions are fully software programmable.
- Slip-in label inserts allow easily modified switch designs.

Ordering Information

Part Number	Description
1100-0455	Programmable Addressable Switch Module

SIGNALING



S1869

3017416

COA # 231-06-E

7165-1703:0125

7170-1703:0126

Class1

Class2

High Rise

City of Denver Approved



GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2013 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9020-0554 Rev. O page 1 of 1